

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 October 2001 (04.10.2001)

PCT

(10) International Publication Number
WO 01/73892 A2

(51) International Patent Classification⁷: **H01Q 15/00**,
3/26

Christamom East, Irvine, CA 92620 (US). **LIVINGSTON, Stan** [US/US]; 4249 W. Franklin, Fullerton, CA 92833 (US).

(21) International Application Number: PCT/US01/09895

(22) International Filing Date: 28 March 2001 (28.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/537,921 29 March 2000 (29.03.2000) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 09/537,921 (CON)
Filed on 29 March 2000 (29.03.2000)

(71) Applicants (for all designated States except US): **HRL LABORATORIES, LLC** [US/US]; 3011 Malibu Canyon Road, Malibu, CA 90265-4799 (US). **RAYTHEON COMPANY** [US/US]; 141 Spring Street, Lexington, MA 02173 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SIEVENPIPER, Daniel** [US/US]; 11300 Exposition Blvd., #215, Los Angeles, CA 90064 (US). **LEE, Jar, J.** [US/US]; 24

(74) Agents: **BERG, Richard, P. et al.**; LADAS & PARRY, 5670 Wilshire Boulevard, Suite 2100, Los Angeles, CA 90036-5679 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN END-FIRE ANTENNA OR ARRAY ON SURFACE WITH TUNABLE IMPEDANCE

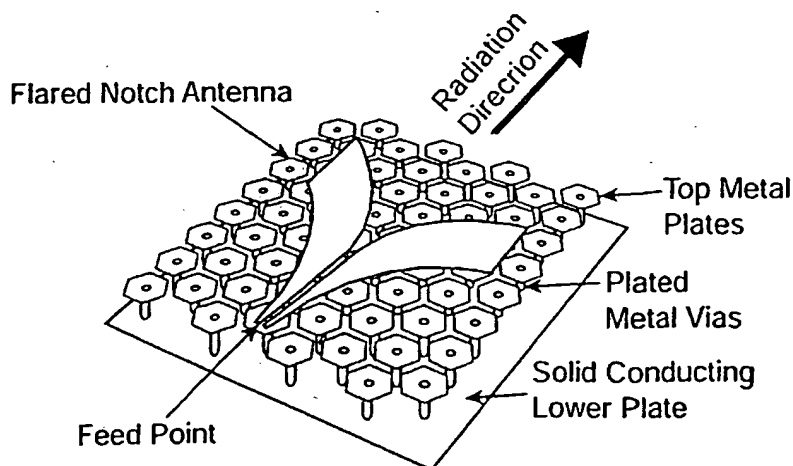

(57) Abstract: A steerable antenna and method of steering a radio frequency wave receiving by and/or transmitting from the antenna. The antenna includes a tunable high impedance surface and at least one end-fire antenna disposed on said surface. The method includes varying the impedance of the tunable high impedance surface.

WO 01/73892 A2

An End-Fire Antenna or Array on Surface with Tunable Impedance

Technical field

- 5 The present invention relates to conformable, flush-mounted antenna which produces end-fire radiation along the surface, and which is steerable in one or two dimensions.

Background of the invention

- 10 The prior art includes a PCT application of D. Sievenpiper and E. Yablonovitch entitled "Circuit and Method for Eliminating Surface Currents on Metals" PCT application PCT/US99/06884, published 7 October 1999 as WO 99/50929. This prior PCT application relates to a high-impedance or Hi-Z surface.
- 15 It is also known in the prior art to place a conformable end-fire antenna or array on a Hi-Z surface. It has been shown that the Hi-Z material can allow flush-mounted antennas to radiate in end-fire mode, with the radiation exiting the surface at a small angle with respect to the horizon.
- 20 The Hi-Z surface, which is the subject matter of the aforementioned PCT application and which is depicted in Figure 1a, includes an array of resonant metal elements 12 arranged above a flat metal ground plane 14. The size of each element is much less than the operating wavelength. The overall thickness of the structure is also much less than the operating wavelength. The presence of the resonant elements has the effect of changing the boundary
- 25 condition at the surface, so that it appears as an artificial magnetic conductor, rather than an electric conductor. It has this property over a bandwidth ranging from a few percent to nearly an octave, depending on the thickness of the structure with respect to the operating

wavelength. It is somewhat similar to a corrugated metal surface 22 (see Figure 1b), which has been known to use a resonant structure to transform a short circuit into an open circuit. Quarter wavelength slots 24 of a corrugated surface 22 are replaced with lumped circuit elements in the Hi-Z surface, resulting in a much thinner structure, as is shown in Figure 1a.

5 The Hi-Z surface can be made in various forms, including a multi-layer structure with overlapping capacitor plates. Preferably the Hi-Z structure is formed on a printed circuit board (not shown in Figure 1) with the elements 12 formed on one major surface thereof and the ground plane 14 formed on the other major surface thereof. Capacitive loading allows the resonance frequency to be lowered for a given thickness. Operating frequencies ranging from
10 hundreds of megahertz to tens of gigahertz have been demonstrated using a variety of geometries of Hi-Z surfaces.

It has been shown that antennas can be placed directly adjacent the Hi-Z surface and will not be shorted out due to the unusual surface impedance. This is based on the fact that the Hi-Z
15 surface allows a non-zero tangential radio frequency electric field, a condition which is not permitted on an ordinary flat conductor. In one example, a flared notch antenna was placed on a Hi-Z surface, such that the metal shapes making up the antenna are oriented parallel to the surface, as shown in Figure 2. The antenna exhibits end-fire radiation, in which the radio waves are emitted with the electric field being tangential to the surface, in the form of a leaky
20 TE surface wave.

The radiation pattern for the flared notch antenna on the Hi-Z surface is shown in Figure 3, along with the pattern for a similar antenna on a flat metal surface. On the Hi-Z surface, the radiation is emitted at 30 degrees to the horizontal, compared to 60 degrees on the metal
25 surface. This suggests that by changing the surface impedance, one can steer a beam in elevation over a range of at least 30 degrees. Tunable impedance surfaces can be made using a variety of mechanical and/or electrostatic techniques, as described the two patent applications identified above.

30 It has been determined that the angle at which radiation leaves or is received by an antenna

placed about 2.5 cm above a Hi-Z surface depends upon the impedance of the surface. As described in the two U.S. patent applications identified in the immediately preceding paragraph, this surface impedance can be tuned in real time using a variety of techniques. When used with an end-fire array antenna, the antenna can be steered in two dimensions. The
5 antenna is conformable and aerodynamic and can be readily incorporated into the outer skin of an aircraft or other vehicle. Such an antenna can be flush mounted on the exterior walls or rooftops of buildings to provide scanning over a wide angle. Additionally, conformable flush-mounted antennas are useful for automobiles for the reception of cellular signals, personal communication service (PCS) voice and digital data, collision avoidance information, or other
10 data.

In general terms the invention provides a steerable antenna for receiving and/or transmitting a radio frequency wave, the antenna comprising a tunable high impedance surface; and at least one end-fire antenna disposed on said surface.

In another aspect the invention provides a method of steering a radio frequency wave received by and/or transmitted from an antenna, the method comprising: providing a tunable high impedance surface; disposing at least one end-fire antenna disposed on said surface; and varying the impedance of the tunable high impedance surface.

Brief description of the drawings

Figure 1a is a perspective view of a Hi-Z surface;

Figure 1b is a perspective view of a corrugated surface;

Figure 1c is an equivalent circuit for a resonant element on the Hi-Z surface;

30 Figure 2 depicts a flared notch antenna disposed horizontally against a Hi-Z surface;

Figure 3 is a graph of the radiation pattern of an antenna spaced about 2.5 cm above a Hi-Z surface and an antenna spaced about 2.5 cm above a flat metal surface;

- 5 Figure 4 depicts a flared notch antenna disposed on or adjacent a Hi-Z surface and also depicts a radiated beam being steerable or scanable in both azimuth and elevation;

Figure 5 depicts multiple arrays of Yagi-Uda antenna disposed on or adjacent a Hi-Z surface;

- 10 Figures 6a and 6b are plan and side elevation views of a tunable Hi-Z surface comprising pair of printed circuit boards

Figure 6c shows the reflection phase measured at normal incidence during a test of a surface comprising the tunable Hi-Z surface of Figures 6a and 6c with a flared notch antenna placed

- 15 thereagainst;

Figures 7 through 11 show the radiation pattern of the flared notch antenna placed against the tunable Hi-Z surface during the test;

- 20 Figures 12a and 12b depict the application of the antenna disclosed herein on flight surfaces of an aircraft; and

Figure 13 depicts the application of the antenna disclosed herein on a land vehicle.

Detailed Description of the Invention

- The present invention provides an end-fire antenna or an end-fire antenna array 52 disposed on or adjacent to a tunable impedance surface 54. The tunable surface 54 performs elevation steering, while azimuth steering can be performed by using a conventional phased array. This
- 30

structure is shown in Figure 4. Flared notch antennas (one type of end-fire antenna) are shown in this particular embodiment, but other types of end-fire antennas can be used, such as the Yagi-Uda arrays 56 shown in Figure 5. The antennas are arranged in a line across the surface 54, so that individual antennas may be phased, using techniques known in the art, to provide azimuthal steering of a transmitted or received radio frequency beam 58. The
5 antennas can be arranged in other patterns, if desired, such as a circular geometry, depending upon available area and steering requirements in the azimuthal angle. Alternatively, a single element can be used if only elevation steering is desired.

10 The tunable impedance surface 54 can be made to behave as an electric conductor, a magnetic conductor, or anything in between, and be made tunable by using one of several electrostatic or mechanical methods described in PCT application PCT/US01/_____ entitled "A Tunable Impedance Surface" filed on the same date as this application and also as described herein.

15 Experiments indicate that as much as 45 degrees of elevation steering is possible, and even larger angles may be possible with improved design of the surface or optimization of the antenna elements. The azimuthal steering extent is determined by the properties of the linear array.

20 The present invention involves an end-fire antenna disposed on a tunable Hi-Z surface in order for the antenna to be provided with elevational steerability. The antenna radiates a beam that exits the Hi-Z surface at an angle and/or receives a beam at an angle to the Hi-Z surface. By tuning the surface impedance of the Hi-Z surface, the angle at which the beam exits or is received by this surface is varied.

This concept has been tested by constructing a test antenna with a simple tunable Hi-Z surface comprising a pair of printed circuit boards, as shown in Figures 6a and 6b, with a flared notch antenna placed thereagainst. For the test, one of the printed circuit boards 16 was patterned with as a conventional Hi-Z surface having a array of elements 12 formed on one
30 major surface thereof and a ground plane 14 formed on the other major surface thereof. Each

metal element 12 in the array was a square-shaped element having a width of 6.10 mm and located in the array with a 6.35 mm center-to-center interval on a 3.1 mm thick printed circuit board made of FR4. The second board 18 contained an array of floating metal plates or elements 20 formed on one major surface thereof, which elements matched the size, shape and distribution of the elements 12 on the Hi-Z surface, but the second array had no ground plane. The two boards were placed adjacent each other in a parallel arrangement so that their metal elements 12 formed a three dimensional array of parallel-plate capacitors with a third printed circuit board 22 acting as the dielectric between the plates of the capacitors. The third printed circuit board was a 0.1 mm thick polyimide plate. By sliding one of the boards with respect to the other board, the capacitances were varied and thus the surface impedance of the Hi-Z surface was likewise varied. In this way the Hi-Z surface was then tuned. In the experiment, the boards were slid to four different positions to present four different impedances to a flared notch antenna which was placed adjacent the second board 18.

Figure 6c shows the reflection phase of the surface, measured at normal incidence, for the four positions of the two boards 16, 18. The reflection phase can be tuned over a range of nearly 180 degrees for this particular geometry. The variations in the reflection phase indicate a change in surface impedance.

Figures 7 - 11 represent radiation patterns for the mechanically tunable Hi-Z surface described above with reference to Figures 6a and 6b with a flared notch antenna disposed on board 18. Each successive figure represents a movement of 80 μm of the top board 18 relative to the bottom board 16. Thus these five successive figure represent a total movement of 320 μm of the top board 18 relative to the bottom board 16. As can be seen, the main lobe 25 of the RF beam steers by 45 degrees in this test. Thus, as the surface impedance is changed, it can be seen that the elevation angle of the beam also changed.

In the test represented by Figures 7 - 11 a vacuum pump was used to hold the bottom plate 16 snugly against the top plate 18 by applying a suction through holes in plate 16. This effectively eliminated any air space between plates 16 and 18.

- A two-dimensionally steerable, end-fire antenna of the type disclosed herein has uses in a number of applications. For example, since the surface 54 need not be planar, it can conform to the exterior surface of the aircraft wing 61, as shown in Figures 12a and 12b. By mounting
5 antennas in both the upper 62 and lower surfaces 63 of the wing, the combined radio frequency beam can be steered over a wide angle, both above (see numeral 64) and below (see numeral 65) the horizon when the aircraft 60 is flying horizontally. Alternatively, the null formed by the difference of the two signals can be steered, for the accurate tracking of objects.
- 10 Other applications include automotive radar for collision avoidance and active suspension systems, as is illustrated by Figure 13. Using the two dimensional scanning capability of this antenna, radar systems could distinguish small objects on the road from taller objects, such as other cars or pedestrians. Information from lower angles indicating road hazards can be used to adjust an active suspension system in the vehicle.

Having described this invention in connection with a preferred embodiment, modification will now certainly suggest itself to those skilled in the art. As such, the invention is not to be limited to the disclosed embodiments except as required by the appended claims.

1. A steerable antenna for receiving and/or transmitting a radio frequency wave, the antenna comprising:
 - (a) a tunable high impedance surface; and
 - (b) at least one end-fire antenna disposed on said surface.
2. The steerable antenna of claim 1 wherein the at least one end-fire antenna comprises at least one flared notch antenna.
3. The steerable antenna of claim 2 wherein the at least one end-fire antenna comprises an array of flared notch antennas.
4. The steerable antenna of claim 3 wherein the array of flared notch antennas is a linear array of flared notch antennas.
5. The steerable antenna of claim 1 wherein the at least one end-fire antenna is a Yagi-Uda antenna.
6. The steerable antenna of claim 1 wherein the at least one end-fire antenna is an array of Yagi-Uda antennas.
7. The steerable antenna of claim 6 wherein the array of Yagi-Uda antennas is a linear array of Yagi-Uda antennas.
8. The steerable antenna of any one of the preceding claims wherein the tunable high impedance surface comprises at least two relatively moveable insulating substrates, a first one of said at least two relatively moveable insulating substrates having an array of elements disposed on a major surface thereof and a ground plane disposed on another major surface thereof, a second one of said at least two relatively moveable insulating substrates having an array of elements disposed thereon, the array of elements on the second one of said at least two relatively moveable insulating substrates confronting the array of elements on the first

one of said at least two relatively moveable insulating substrates through the second one of said at least two relatively moveable insulating substrates.

9. The steerable antenna of claim 8 wherein two relatively moveable insulating substrates each have a thickness which is less than the wavelength of said radio frequency wave.

10. The steerable antenna of claim 9 wherein the elements forming the array of elements disposed on the two relatively moveable insulating substrates each have a maximum dimension which is less than the wavelength of said radio frequency wave.

11. The steerable antenna of any one of claims 1 - 7 wherein the tunable high impedance surface includes an insulating substrate having an array of elements disposed on a major surface thereof and a ground plane disposed on another major surface thereof and capacitor arrangement for controllably varying the capacitance of adjacent elements of said array.

12. A method of steering a radio frequency wave, received by and/or transmitted from an antenna, the method comprising:

- (a) providing a tunable high impedance surface;
- (b) disposing at least one end-fire antenna disposed on said surface; and
- (c) varying the impedance of the tunable high impedance surface.

13. The method of claim 12 wherein the end-fire antenna is a flared notch antenna.


14. The method of claim 12 wherein the end-fire antenna is an array of flared notch antennas.

15. The method of claim 14 wherein the array of flared notch antennas is a linear array of flared notch antennas.

16. The method of claim 12 wherein the end-fire antenna is a Yagi-Uda antenna.

17. The method of claim 12 wherein the end-fire antenna is an array of Yagi-Uda antennas.
18. The method of claim 17 wherein the array of Yagi-Uda antennas is a linear array of Yagi-Uda antennas.
19. The method of any one of claims 12 - 18 wherein the tunable high impedance surface comprises at least two relatively moveable insulating substrates, a first one of said at least two relatively moveable insulating substrates having an array of elements disposed on a major surface thereof and a ground plane disposed on another major surface thereof, a second one of said at least two relatively moveable insulating substrates having an array of elements disposed thereon, the array of elements on the second one of said at least two relatively moveable insulating substrates confronting the array of elements on the first one of said at least two relatively moveable insulating substrates through the second one of said at least two relatively moveable insulating substrates and wherein the step of varying the impedance of the tunable high impedance surface comprises moving the first and second insulating substrates relative to each other.
20. The method of claim 19 wherein two relatively moveable insulating substrates each have a thickness which is less than the wavelength of said radio frequency wave.
21. The method of claim 20 wherein the elements forming the array of elements disposed on the two relatively moveable insulating substrates each have a maximum dimension which is less than the wavelength of said radio frequency wave.
22. The method of any one of claims 12 - 18 wherein the tunable high impedance surface includes an insulating substrate having an array of elements disposed on a major surface thereof and a ground plane disposed on another major surface thereof and capacitor arrangement for controllably varying the capacitance of adjacent elements of said array and wherein the step of varying the impedance of the tunable high impedance surface comprises varying the capacitance of adjacent elements of said array.

1/6

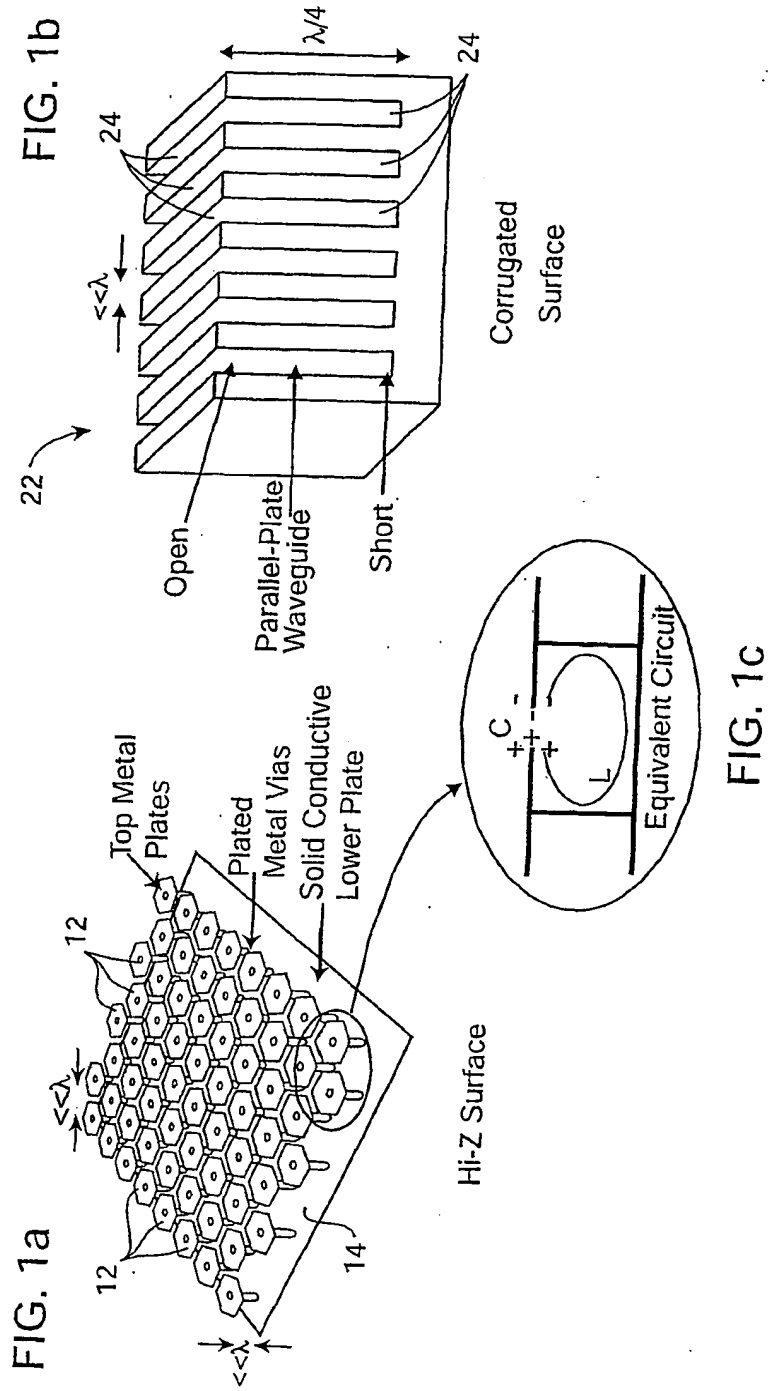

2/6

FIG. 2

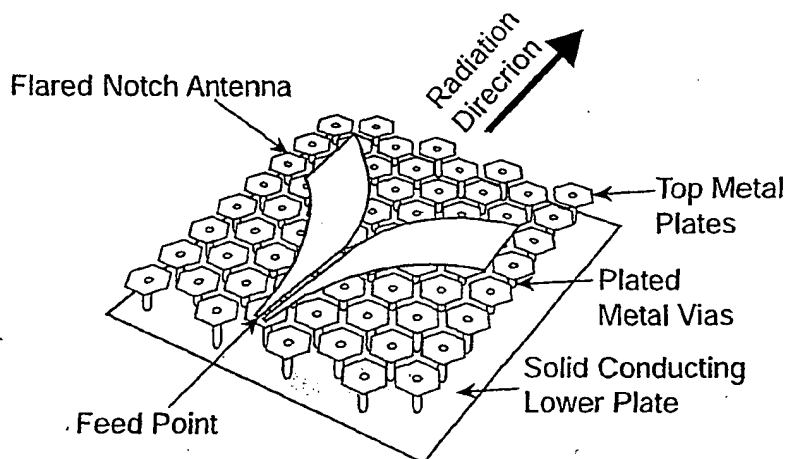


FIG. 3


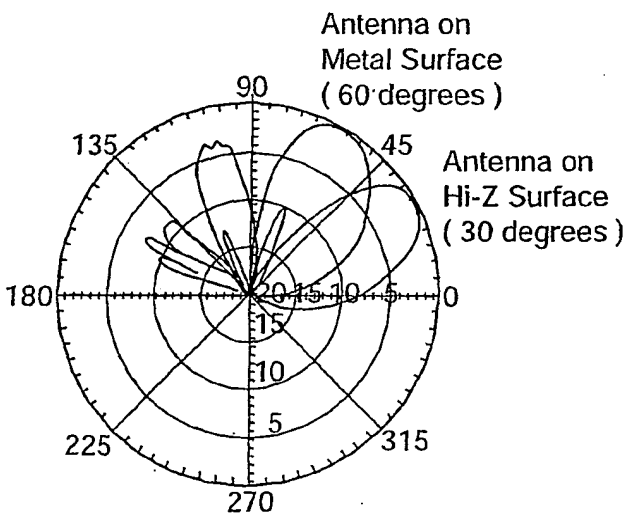


FIG. 4

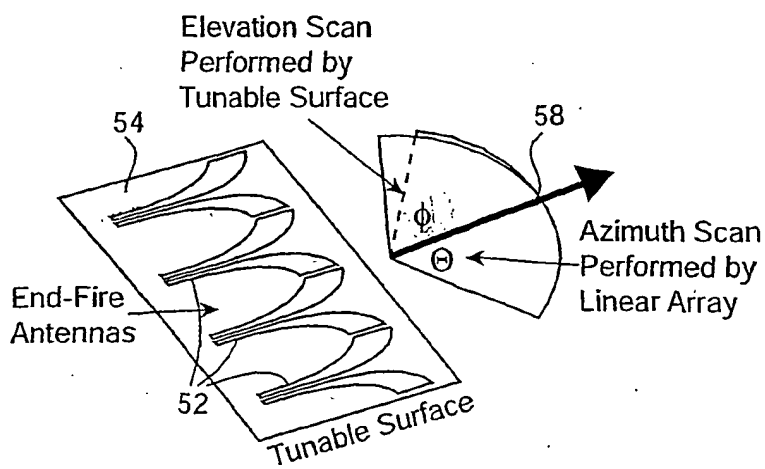

3/6

FIG. 5

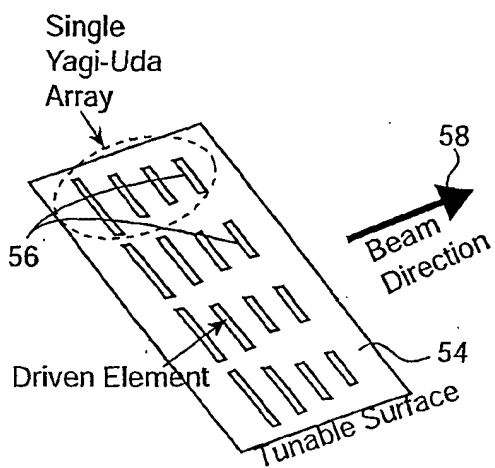


FIG. 6a


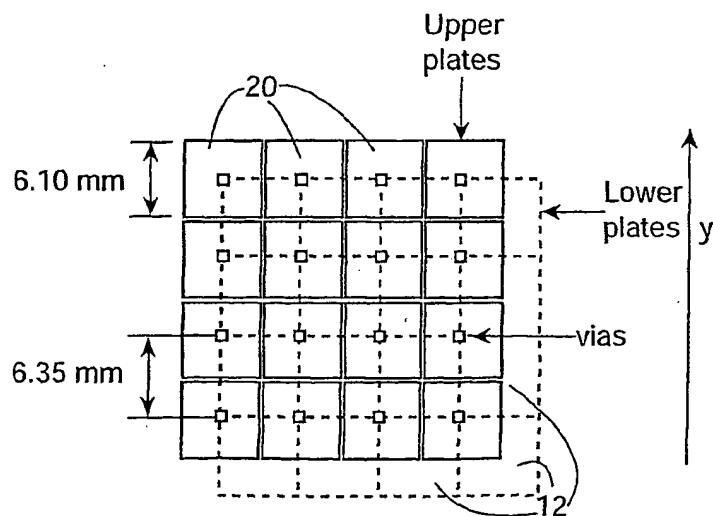


FIG. 6b

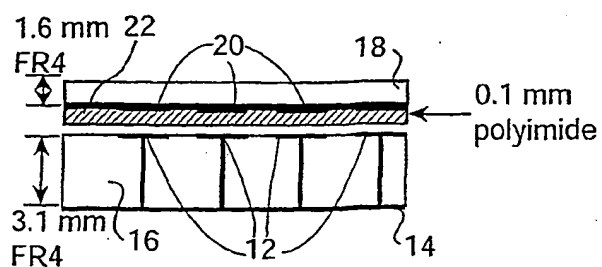

4/6

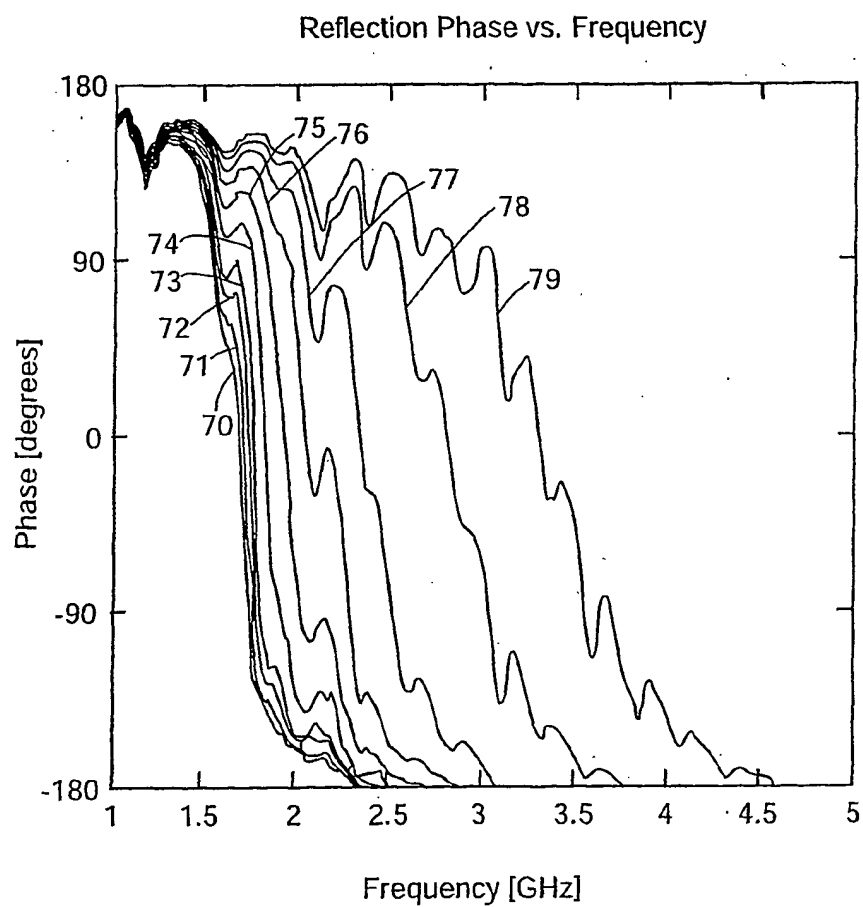


FIG. 6c

5/6

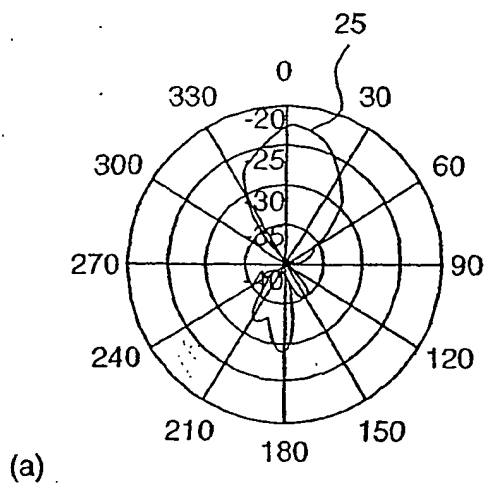


FIG. 7

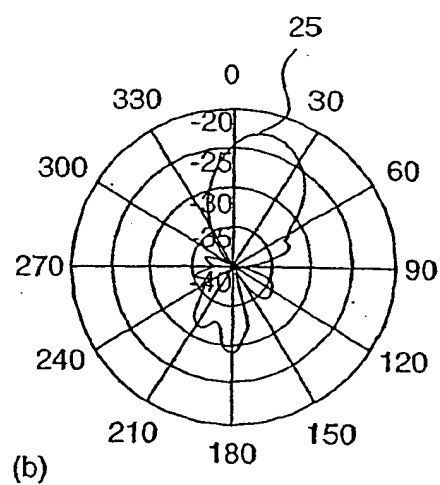


FIG. 8

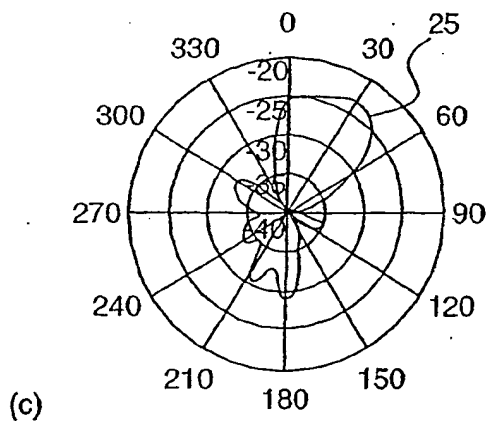


FIG. 9

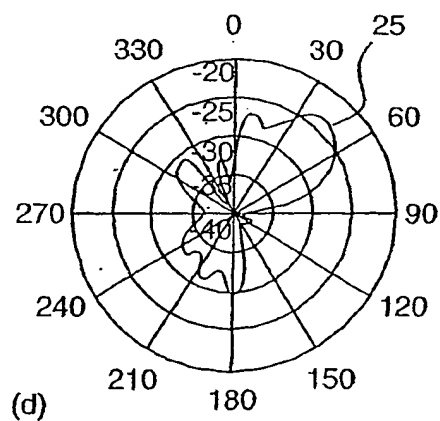


FIG. 10

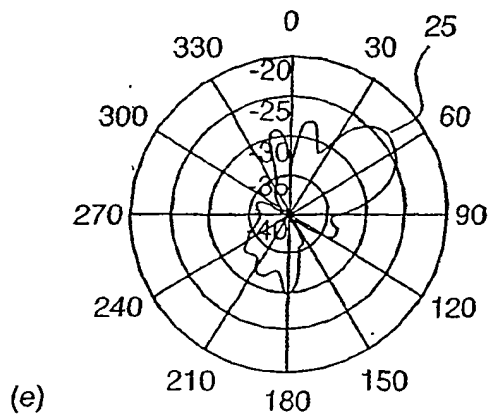


FIG. 11

6/6

FIG. 12a

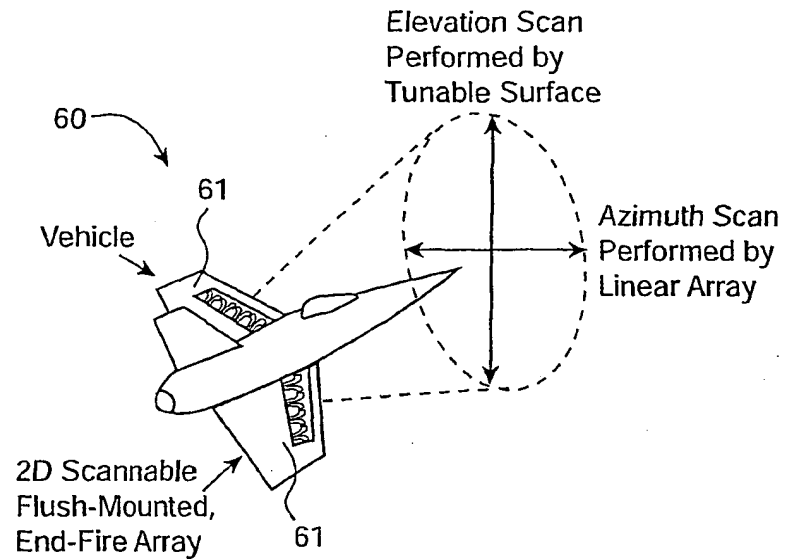


FIG. 12b


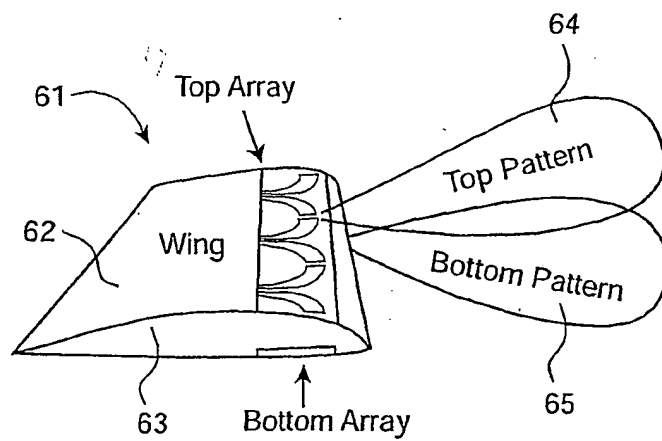


FIG. 13

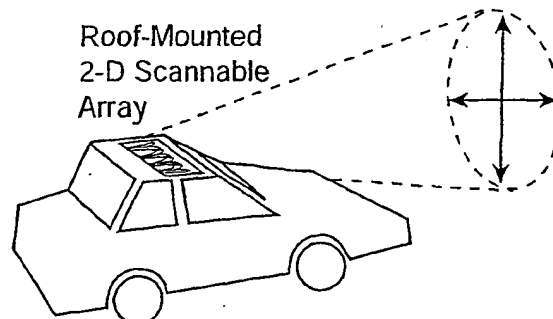

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/09895

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01Q15/00 H01Q3/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ELLIS T J ET AL: "MM-WAVE TAPERED SLOT ANTENNAS ON MICROMACHINED PHOTONIC BANDGAP DIELECTRICS" 1996 IEEE MTT-S INTERNATIONAL MICROWAVE SYMPOSIUM DIGEST. SAN FRANCISCO, JUNE 17 - 21, 1996, IEEE MTT-S INTERNATIONAL MICROWAVE SYMPOSIUM DIGEST, NEW YORK, IEEE, US, vol. 2, 17 June 1996 (1996-06-17), pages 1157-1160, XP000732548 ISBN: 0-7803-3247-4 the whole document	1-22
A	WO 94 00891 A (UNIV LOUGHBOROUGH ; VARDAXOGLU JOHN COSTAS (GB)) 6 January 1994 (1994-01-06) abstract	8-22
-/--		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

10 August 2001

Date of mailing of the international search report

21/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Wattiaux, V

INTERNATIONAL SEARCH REPORT

In ternational Application No
PCT/US 01/09895

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	D. SIEVENPIPER AND CO.: "low-profile, four-sector diversity antenna on high-impedance ground plane" ELECTRONICS LETTERS, vol. 36, no. 16, 3 August 2000 (2000-08-03), pages 1343-1345, XP001019689 the whole document	1-3
A	J.H. SHCAFFNER AND CO.: "reconfigurable aperture antennas using rf mems switches for multi-octave tunability and beam steering" IEEE, 2000, pages 321-324, XP001019688 the whole document	1-22

Information on patent family members

PCT/US 01/09895

Form PCT/ISA/210 (patent family annex) (July 1992)